




AM-HRR3-xxx AM Receiver Modules AM-HRR6-xxx

DESCRIPTION


The AM-HRR3/6 AM Receiver modules are compact hybrid RF receivers, which can be used to capture undecoded data from any 315, 418 or 433MHz AM Transmitter, such as the AM-RT5 transmitter modules. The modules exhibit a very high frequency stability over a wide operating temperature even when subjected to mechanical vibrations or manual handling. A unique laser trimming process (now patented) gives a highly accurate circuit inductor (AM-HRR3&6), eliminating the need for any adjustable components as found on most other regenerative receivers. All receivers are pin compatible, providing a CMOS/TTL output. They require connections to power and antenna only. These modules conform to EMC directive ETSI 300-220.

FEATURES


- COMPACT HYBRID MODULE
- VERY HIGH FREQUENCY STABILITY
- WITH NO ADJUSTABLE COMPONENTS
- HIGH SENSITIVITY
- CMOS/TTL COMPATIBLE OUTPUT
- SINGLE SUPPLY VOLTAGE 5V
- LOW CURRENT CONSUMPTION: AM-HRR6 TYP 0.8mA
- PATENTED LASER TRIMMED INDUCTOR (AM-HRR3 &6)
- AVAILABLE ON 315MHz, 418MHz AND 433.92MHz

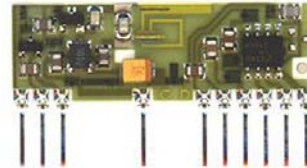

BLOCK DIAGRAM

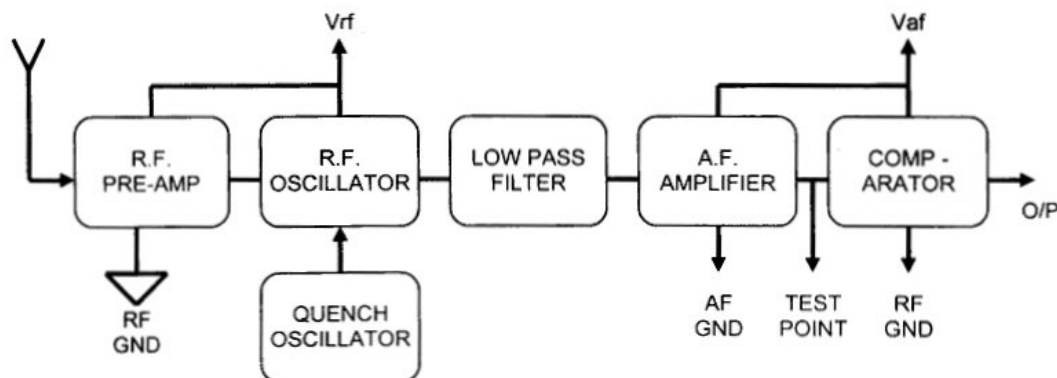

MECHANICAL OUTLINE

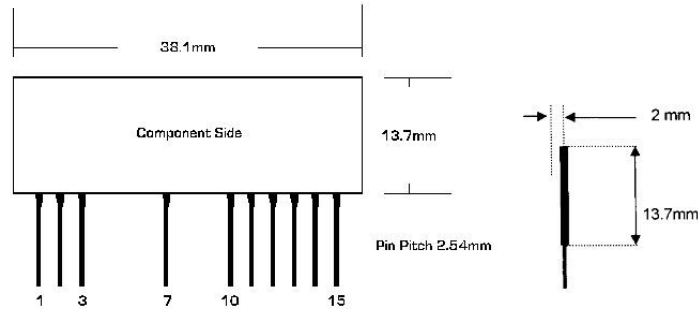

Pin No	Pin No	Pin Name	Pin Name
1	RF +Vcc	8,9	NC
2	RF GND	10	AF +VCC
3	DATA IN (Ant)	11	AF GND
4	NC	12	AF +VCC
5	NC	13	TEST POINT
6	NC	14	DATA OUT
7	RF GND	15	AF +VCC

SPECIFICATIONS

Ambient Temperature = 25°C

ELECTRICAL CHARACTERISTICS	MIN	TYPICAL	MAX	DIMENSION
Storage Temperature Range	-30		+85	°C
Operating Temperature Range	-25		+85	°C
RF Supply Voltage (RF+Vcc)	4.5	5	5.5	V
AF Supply Voltage (AF+Vcc)	4.5	5	5.5	V
Supply Current (AM-HRR3-XXX)		2.5	3	mA
Supply Current (AM-HRR6-XXX)		0.5		mA
Working Frequency	200		450	MHz
Tuning Tolerance		+/-0.2	+/-0.5	MHz
-3dB Bandwidth		+/-2	+/-3	MHz
Max Data Rate			2	KHz
Time from Power HRR3 on to Valid Output Signal		1.2		Secs
Time from Power HRR6 on to Valid Output Signal		150		mSecs
R.F Sensitivity 100% AM (AM-HRR3-XXX)	-100	-105		dBm
R.F Sensitivity 100% AM (AM-HRR3-XXX-LP)		-98		dBm
R.F Sensitivity 100% AM (AM-HRR6-XXX)		-95		dBm
Level of Emitted Spectrum		-65	-60	dBm
Low Level Output Voltage			0.6	V
High Level Output Voltage	4.5			V

ANTENNA

Attach a 1/4 wire antenna connected to pin 3. The length for 315MHz will be 22.7cm, for 418MHz, 17cm and for 433.92MHz, 16.5cm. ABACOM Technologies offers a range of manufactured antenna designed for use with our RF modules and are recommended for best performance.

Disclaimer:

Technical specifications are subject to change without notice. Whilst every effort has been made to ensure the accuracy of the information contained in this document, ABACOM Technologies Inc. does not assume responsibility for any errors or omissions that may exist. ABACOM Technologies Inc. does not assume responsibility for any damage caused through use or misuse of their products and the onus lies entirely with the end user in determining the suitability of and use of the product for any particular application. ABACOM Technologies Inc. products are not recommended for applications where human life may be at risk.